



# **CrossLink-NX-33 and CrossLinkU-NX Hardware Checklist**

## **Technical Note**

FPGA-TN-02308-1.2

March 2024

## Disclaimers

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS, with all faults, and all associated risk is the responsibility entirely of the Buyer. The information provided herein is for informational purposes only and may contain technical inaccuracies or omissions, and may be otherwise rendered inaccurate for many reasons, and Lattice assumes no obligation to update or otherwise correct or revise this information. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. LATTICE PRODUCTS AND SERVICES ARE NOT DESIGNED, MANUFACTURED, OR TESTED FOR USE IN LIFE OR SAFETY CRITICAL SYSTEMS, HAZARDOUS ENVIRONMENTS, OR ANY OTHER ENVIRONMENTS REQUIRING FAIL-SAFE PERFORMANCE, INCLUDING ANY APPLICATION IN WHICH THE FAILURE OF THE PRODUCT OR SERVICE COULD LEAD TO DEATH, PERSONAL INJURY, SEVERE PROPERTY DAMAGE OR ENVIRONMENTAL HARM (COLLECTIVELY, "HIGH-RISK USES"). FURTHER, BUYER MUST TAKE PRUDENT STEPS TO PROTECT AGAINST PRODUCT AND SERVICE FAILURES, INCLUDING PROVIDING APPROPRIATE REDUNDANCIES, FAIL-SAFE FEATURES, AND/OR SHUT-DOWN MECHANISMS. LATTICE EXPRESSLY DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY OF FITNESS OF THE PRODUCTS OR SERVICES FOR HIGH-RISK USES. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

## Contents

Contents .....	3
Acronyms in This Document .....	5
1. Introduction .....	6
2. Power Supplies .....	7
2.1. Power Noise .....	7
2.2. Power Source .....	7
2.3. Recommended Power Filtering Groups and Components .....	8
2.4. Unused Bank(s) $V_{CCIOx}$ .....	9
2.5. Unused Hardware Always On Block (LIFCL-33U only) .....	9
2.6. Unused USB Block (LIFCL-33U only) .....	9
2.7. Ground Pins .....	9
3. Component Selection .....	10
3.1. Ferrite Bead Selection .....	10
3.2. Capacitor Selection .....	10
3.2.1. Capacitor Dielectric .....	10
3.2.2. Voltage Rating .....	10
3.2.3. Size .....	10
4. Power Sequencing .....	11
5. Power Estimation .....	12
6. Configuration Considerations .....	13
6.1. JTAG .....	13
6.2. Slave SPI and I2C Configuration .....	13
6.3. Configuration Pins Per Programming Mode .....	14
7. External SPI Flash .....	16
8. I/O Pin Assignments .....	17
8.1. Series Termination Resistors .....	17
8.2. Functional Blocks Rule-Based Pinout Considerations .....	17
8.3. LVDS and MIPI Pin Assignments .....	17
8.4. HSUL and SSTL Pin Assignments .....	17
8.5. USB Block Pin Assignments (LIFCL-33U only) .....	18
9. sys/O .....	19
10. Clock Inputs .....	21
11. Layout Recommendations .....	22
12. Checklist .....	23
References .....	25
Technical Support Assistance .....	26
Revision History .....	27

## Figures

Figure 2.1. Recommended Power Filters.....	9
Figure 6.1. Typical Connections for Programming SRAM or External Flash via JTAG/SSPI.....	14
Figure 6.2. Typical Connections for Programming SRAM via I <sup>2</sup> C/I <sup>3</sup> C.....	15
Figure 6.3. Accommodation for Mixed Voltage Across Configuration Banks.....	15
Figure 9.1. High-Performance sysI/O Buffer Pair for Bottom Side.....	19
Figure 9.2. Wide-Range sysI/O Buffer for Top and Left/Right Sides.....	20
Figure 10.1. Clock Oscillator Bypassing.....	21
Figure 10.2. PCB Dual Footprint Design Supporting HCSL and LVDS Oscillators.....	21
Figure 11.1. Recommended Layout.....	22

## Tables

Table 2.1. Single-Ended I/O Standards.....	7
Table 2.2. Recommended Power Filtering Groups and Components.....	8
Table 3.1. Recommended Capacitor Sizes.....	10
Table 6.1. JTAG Pin Recommendations.....	13
Table 6.2. Pull-up/Pull-down Recommendations for Configuration Pins.....	13
Table 6.3. Configuration Pins Needed per Programming Mode <sup>1</sup> .....	14
Table 9.1. Weak Pull-up/Pull-down Current Specifications.....	19
Table 12.1. Hardware Checklist.....	23

## Acronyms in This Document

A list of acronyms used in this document.

Acronym	Definition
BGA	Ball Grid Array
FPGA	Field-Programmable Gate Array
HCSL	High Speed Current Steering Logic
HPIO	High-Performance Input/Output
I/O	Input/Output
LVDS	Low-Voltage Differential Signaling
MIPI	Mobile Industry Processor Interface
PCB	Printed Circuit Board
USB	Universal Serial Bus
WRIO	Wide-Range Input/Output

# 1. Introduction

When designing complex hardware using the CrossLink™-NX-33 and CrossLinkU™-NX devices (hereafter referred to as LIFCL-33 and LIFCL-33U respectively), you must pay special attention to critical hardware configuration requirements. This technical note steps through these critical hardware implementation items relative to the LIFCL-33/33U devices. The document does not provide detailed step-by-step instructions but gives a high-level summary checklist to assist in the design process.

The LIFCL-33/33U devices include up to 33k Logic Cells. This technical note assumes that the reader is familiar with the LIFCL-33/33U device features as described in [CrossLink-NX-33 and CrossLinkU-NX Data Sheet \(FPGA-DS-02104\)](#). The data sheet includes the functional specification for the device. Topics covered in the data sheet include but are not limited to the following:

- High-level functional overview
- Pinouts and packaging information
- Signal descriptions
- Device-specific information about peripherals and registers
- Electrical specifications

Refer to [CrossLink-NX-33 and CrossLinkU-NX Data Sheet \(FPGA-DS-02104\)](#) for details. The critical hardware areas covered in this technical note are:

- Power supplies as they relate to the LIFCL-33 device power supply rails and how to connect them to the PCB and the associated system
- Configuration mode selection for proper power-up behavior
- Device I/O interface and critical signals

**Important:** You should refer to the following documents for detailed recommendations.

- [sysCONFIG Usage Guide for Nexus Platform \(FPGA-TN-02099\)](#)
- [sysI/O Usage Guide for Nexus Platform \(FPGA-TN-02067\)](#)
- [sysCLOCK PLL Design and Usage Guide for Nexus Platform \(FPGA-TN-02095\)](#)
- [Memory Usage Guide for Nexus Platform \(FPGA-TN-02094\)](#)
- [CrossLink-NX 33 and CrossLinkU-NX High-Speed I/O Interface \(FPGA-TN-02280\)](#)
- [Thermal Management \(FPGA-TN-02044\)](#)
- [sysDSP Block Usage Guide for Nexus Platform \(FPGA-TN-02096\)](#)
- [Electrical Recommendations for Lattice SERDES \(FPGA-TN-02077\)](#)
- [High-Speed PCB Design Considerations \(FPGA-TN-02178\)](#)
- [Power Decoupling and Bypass Filtering for Programmable Devices \(FPGA-TN-02115\)](#)
- [CrossLink-NX LIFCL-33 Pinout \(FPGA-SC-02040\)](#)
- [CrossLink-NX LIFCL-33U Pinout \(FPGA-SC-02050\)](#)
- [USB 2.0/3.2 IP Core User Guide \(FPGA-IPUG-02237\)](#)

## 2. Power Supplies

The  $V_{CC}$ ,  $V_{CCAUXA}$ , and  $V_{CCIOX}$  power supplies are monitored to determine the LIFCL-33/33U device internal Power Good condition during power-up. These supplies need to be at a valid and stable level before the device becomes operational. All other supplies are not monitored during power-up, but need to be at valid and stable level before the device configuration is complete and enters User Mode.

Table 2.1 describes the power supplies and the appropriate voltage levels for each supply.

**Table 2.1. Single-Ended I/O Standards**

Supply	Voltage (Nominal Value)	Description
$V_{CC}$ , $V_{CCECLK}$	1.0 V	FPGA core power supply. Required for Power Good condition.
$V_{CCAUXA}$	1.8 V	Auxiliary power supply voltage for core logic.
$V_{CCAUX}$	1.8 V	Auxiliary power supply voltage for internal analog circuitry Banks 0, 1, and 5. Required for Power Good condition.
$V_{CCAUXH[4:2]}$	1.8 V	Auxiliary power supply voltage for internal analog circuitry Banks 2, 3, and 4.
$V_{CCIO[5:0]}$	Banks 0, 1, 5: 1.0 V, 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V. Banks 2, 3, 4: 1.0 V, 1.2 V, 1.5 V, 1.8 V.	Bank I/O Driver Supply Voltage. Each bank has its own $V_{CCIO}$ supply: $V_{CCIO0}$ and $V_{CCIO1}$ are used in conjunction with pins dedicated and shared with device configuration, and are required for Power Good condition.
$V_{CCAUX\_AON}$	1.8 V	Auxiliary power for Hardware Always On circuitry.
AVDD33	3.3 V	Analog power supply voltage for Hardened USB block.
AVDD18, AVDD18_TX, AVDD18_COM	1.8 V	Analog power supply voltage for Hardened USB block.
AVDD, AVDD_TX	1.0 V	Analog power supply voltage for Hardened USB block.

### Notes:

- Bank 5 is only supported in LIFCL-33 device.
- $V_{CCAUX\_AON}$ , AVDD33, AVDD18, AVDD18\_TX, AVDD18\_COM, AVDD, AVDD\_TX are only supported in LIFCL-33U device.

The LIFCL-33/33U FPGA devices have a power-on-reset state machine that depends on  $V_{CC}$ ,  $V_{CCAUX}$ ,  $V_{CCIO[1:0]}$  power supplies. These supplies should come up monotonically. Initialization of the device does not proceed until all monitored power supplies have reached their minimum operating voltages.

### 2.1. Power Noise

The power rail voltages of the FPGA allow for a worst-case normal operating tolerance of  $\pm 5\%$  of these voltages. The 5% tolerance includes any noises.

### 2.2. Power Source

The recommendation is to design voltage regulators to be accurate to within 3% of the optimum voltage to allow power noise design margin.

When calculating the voltage regulator total tolerance, include:

- Regulator voltage reference tolerance
- Regulator line tolerance
- Regulator load tolerance
- Tolerances of any resistors connected to regulator's feedback pin which sets regulator's output voltage
- Expected voltage drops due to power filtering ferrite bead's ESR \* expected current draw
- Expected voltage drops due to current measuring resistor's ESR \* expected current draw

With 3% tolerance allocated to the voltage source, the design has a remaining 2% tolerance for noise and layout related issues. The 1.0 V rail is especially sensitive to noise as every 10 mV is 1% of the rail voltage. For PLLs, target less than 0.25% peak noise.

Supplies should be decoupled with adequate power filters. Bypass capacitors must be located close to the device package pins.

For the best jitter performance, especially with MIPI functionality, optimize pin assignment to keep noisy I/O pins away from sensitive functional pins. The leading causes of PCB related crosstalk to sensitive blocks is related to FPGA outputs located in close proximity to the sensitive power supplies. These supplies require cautious board layout to ensure noise immunity to the switching noise generated by FPGA outputs.

### 2.3. Recommended Power Filtering Groups and Components

**Table 2.2. Recommended Power Filtering Groups and Components**

Power Input	Recommended Filter	Notes
V <sub>CC</sub> , V <sub>CC</sub> ECLK	10 μF x 3 + 100 nF per pin	Core logic. 1.0 V
V <sub>CCAUXA</sub>	120 Ω FB + 10 μF + 100 nF per pin	Auxiliary power supply pin for Core logic. 1.8 V
V <sub>CCAUX</sub> and V <sub>CCAUXH</sub> [4:2] Combined Together	120 Ω FB + 10 μF x 2 + 100 nF per pin	Auxiliary power supply pin for internal analog circuitry. V <sub>CCAUX</sub> Banks 0, 1, 5. V <sub>CCAUXH</sub> [4:2] Banks 2, 3, 4. 1.8 V
V <sub>CCIO</sub> [5:0]	10 μF + 100 nF per pin	Bank I/O. Unused banks can use a single 100 nF. For banks with lots of outputs or large capacitive loading add one additional 10 μF (or can use a single 22 μF instead of two 10 μF.) Banks 0, 1, 5 = 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V. Banks 2, 3, 4 = 1.0 V, 1.2 V, 1.35 V, 1.5 V, 1.8 V.
V <sub>CCAUX_AON</sub>	10 μF + 100 nF	Auxiliary power for Hardware Always On circuitry. 1.8 V
AVDD33	120 Ω FB + 10 μF + 100 nF per pin	Analog power supply voltage for Hardened USB block. 3.3 V
AVDD18, AVDD18_TX, AVDD18_COM Combined Together	120 Ω FB + 10 μF + 100 nF per pin	Analog power supply voltage for Hardened USB block. 1.8 V
AVDD, AVDD_TX Combined Together	120 Ω FB + 10 μF + 100 nF per pin	Analog power supply voltage for Hardened USB block. 1.0 V

**Notes:**

- Bank 5 is only supported in LIFCL-33 device.
- V<sub>CCAUX\_AON</sub>, AVDD33, AVDD18, AVDD18\_TX, AVDD18\_COM, AVDD, AVDD\_TX are only supported in LIFCL-33U device.

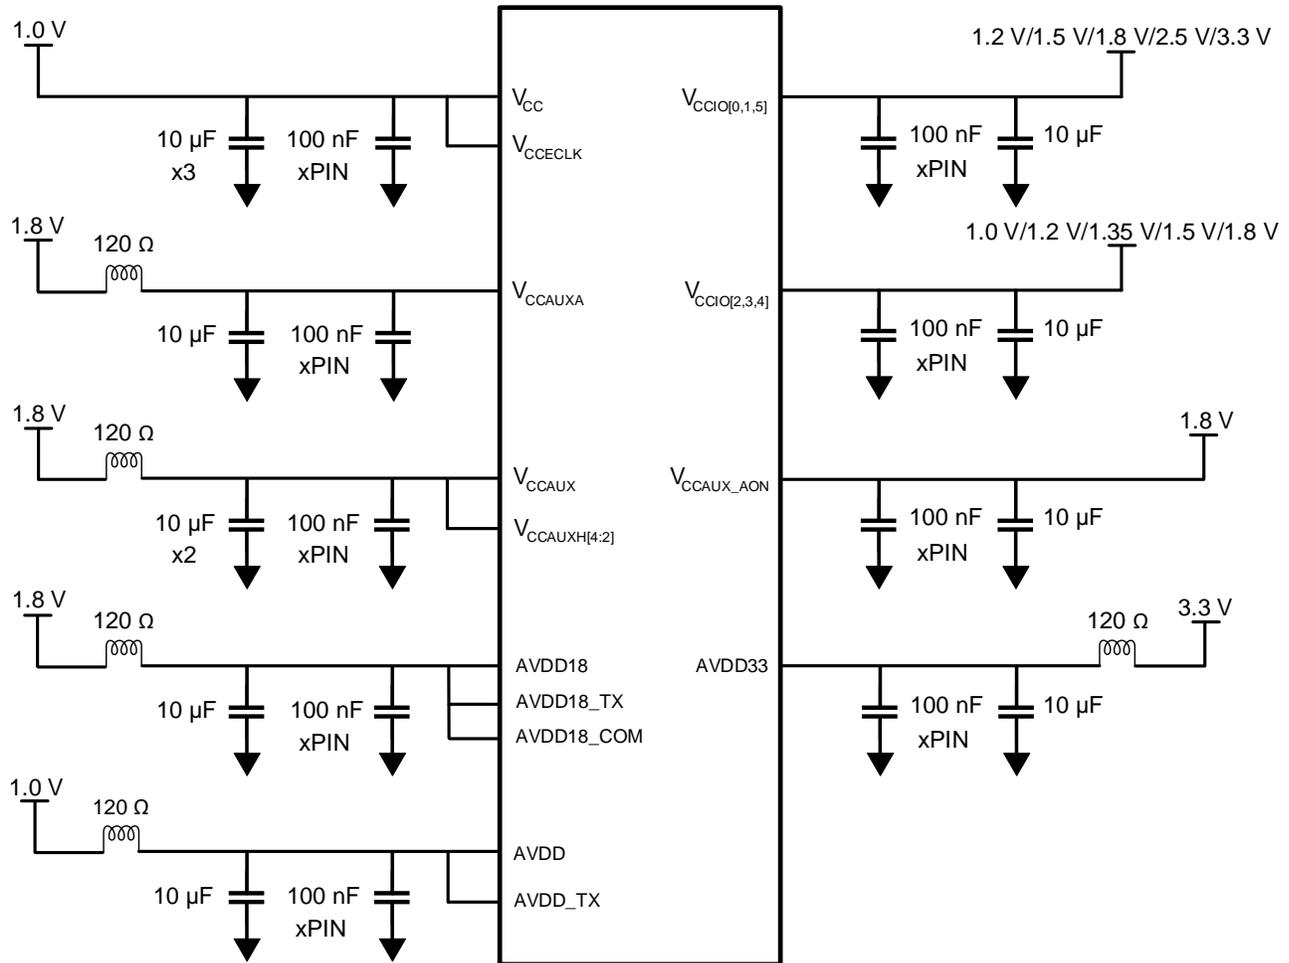


Figure 2.1. Recommended Power Filters

## 2.4. Unused Bank(s) V<sub>CCIOx</sub>

Connect unused V<sub>CCIOx</sub>s to a power rail, do not leave them open.  
 Unused banks can use a single 100 nF bypass capacitor.

## 2.5. Unused Hardware Always On Block (LIFCL-33U only)

Connect unused V<sub>CCAUX\_AON</sub> to 1.8 V and bypass with a single 100 nF capacitor.  
 Add 10 kΩ pull-down resistor to AON\_INT pin.

## 2.6. Unused USB Block (LIFCL-33U only)

Connect AVDD33 to 3.3 V and bypass with a single 100 nF capacitor.  
 Connect AVDD18, AVDD18\_TX, and AVDD18\_COM to 1.8 V and bypass with a single 100 nF capacitor.  
 Connect AVDD and AVDD\_TX to 1.0 V and bypass with a single 100 nF capacitor.

## 2.7. Ground Pins

All ground pins need to be connected to the board's ground plane.

## 3. Component Selection

### 3.1. Ferrite Bead Selection

- Most designs work well using ferrite beads between 120 Ω @100 MHz and 240 Ω @100 MHz.
- Ferrite bead induced noise voltage from ESR \* CURRENT should be < 1% of rail voltage for non-analog rails and < 0.25% for sensitive rails.
- Non-PLL rails should use ferrite beads with ESR between 0.025 Ω and 0.10 Ω depending on current load.
- PLL rails draw low current which allows ferrite beads with ESR ≤ 0.3 Ω.
- Small package size ferrite beads have higher ESR than large package size ferrite beads of same impedance.
- High impedance ferrite beads have higher ESR than low impedance ferrite beads in the same package size.

### 3.2. Capacitor Selection

When specifying components, choose good quality ceramic capacitors in small packages and place them close to the power oscillator supply pins with short low inductance connections. Good quality capacitors for bypassing generally meet the requirements discussed in the following sections.

#### 3.2.1. Capacitor Dielectric

Use X5R, X7R, and similar dielectrics with good capacitance tolerance (≤ ±20%) over temperature range. Avoid Y5V, Z5U, and similarly poor capacitance-controlled dielectrics.

#### 3.2.2. Voltage Rating

Capacitor working capacitance decreases non-linearly with higher voltage bias. To maintain capacitance, the capacitor voltage rating should target at least 80% higher than the voltage rail (maximum). For example: 3.3 V rail bypass capacitors should use the commonly available 6.3 V rating as a minimum.

#### 3.2.3. Size

Smaller body capacitors have lower inductance, work to higher frequencies, and improve board layout. For a given voltage rating, smaller body capacitors tend to cost more than larger body capacitors. Optimizing between market pricing and size related inductance, recommended capacitor sizes are in [Table 3.1](#).

**Table 3.1. Recommended Capacitor Sizes**

Capacitance	Size Preferred	Size Next Best
0.1 μF	0201	0402
1.0 μF, 2.2 μF	0402	0201
4.7 μF	0402	0603
10 μF	0402	0603
22 μF	0805	0603

## 4. Power Sequencing

There is no power-up sequence required for the LIFCL-33 device.

## 5. Power Estimation

Once the LIFCL-33/33U devices' density, package, and logic implementation is decided, power estimation for the system environment should be determined based on the Power Calculator provided as part of the Lattice Radiant® design tool. When estimating power, the designer should keep two goals in mind:

- Power supply budgeting should be based on the maximum of the power-up in-rush current, configuration current, and maximum DC and AC current for the given system environmental conditions.
- Thermal considerations are also important. The thermal design of the system environment and LIFCL-33/33U devices should be able to support operating at maximum operating junction temperature.

The above two criteria should be taken into consideration early in the design phase.

## 6. Configuration Considerations

PCB layout design and breakout suggestions are outlined in [PCB Layout Recommendations for BGA Packages \(FPGA-TN-02024\)](#).

The LIFCL-33/33U devices include provisions to configure the FPGA through the JTAG interface or several modes utilizing the sysCONFIG port.

### 6.1. JTAG

The JTAG port includes a JTAG Enable pin and a 4-pin interface, as shown in [Table 6.1](#).

**Table 6.1. JTAG Pin Recommendations**

JTAG Pin	PCB Recommendation
TDI/SI	4.7 kΩ pull-up to V <sub>CCIO1</sub>
TMS/SCSN	4.7 kΩ pull-up to V <sub>CCIO1</sub>
TDO/SO	4.7 kΩ pull-up to V <sub>CCIO1</sub>
TCK/SCLK	2.2 kΩ pull-down to GND

Every PCB is recommended to have easy access to FPGA JTAG pins, even if the primary configuration interface is not using the JTAG port. This JTAG port enables debugging in the final system. For best results, route the TCK, TMS, TDI, and TDO signals to a common test header along with V<sub>CCIO1</sub> and ground.

### 6.2. Slave SPI and I2C Configuration

While the pins listed in [Table 6.2](#) have internal weak pull resistors, pull-up resistors to the appropriate bank V<sub>CCIO</sub> and pull-down to board ground for these pins should be used as indicated under PCB Connection.

**Table 6.2. Pull-up/Pull-down Recommendations for Configuration Pins**

Pin	PCB Connection
PROGRAMN	4.7 kΩ pull-up to V <sub>CCIO0</sub>
INITN	4.7 kΩ pull-up to V <sub>CCIO1</sub>
DONE	4.7 kΩ pull-up to V <sub>CCIO1</sub>
JTAG_EN	4.7 kΩ pull-down to GND (JTAG port disabled) or 1.0 kΩ pull-up to V <sub>CCIO1</sub> (JTAG port enabled)
MCLK	1.0 kΩ to GND (Not installed by default) 1.0 kΩ to V <sub>CCIO0</sub> (Not installed by default)
MCSN	4.7 kΩ pull-up to V <sub>CCIO0</sub>
MD0	10 kΩ pull-up to V <sub>CCIO0</sub> (Not installed by default)
MD1	10 kΩ pull-up to V <sub>CCIO0</sub> (Not installed by default)
MD2	10 kΩ pull-up to V <sub>CCIO0</sub> (Not installed by default)
MD3	10 kΩ pull-up to V <sub>CCIO0</sub> (Not installed by default)
TMS/SCSN	4.7 kΩ pull-up to V <sub>CCIO1</sub>
SCL/SDA	1.0 kΩ to 4.7 kΩ pull-up to V <sub>CCIO1</sub>

### 6.3. Configuration Pins Per Programming Mode

Table 6.3 lists the signal pins required for each configuration-programming mode.

Table 6.3. Configuration Pins Needed per Programming Mode<sup>1</sup>

Configuration Mode	Bank	Enablement	Clock		Bus Size	Pins
			Pin	I/O		
MSPI	0	(Default)	MCLK	Output	1	MCLK, MCSN, MOSI, MISO
					2	MCLK, MCSN, MD0, MD1
					4	MCLK, MCSN, MD0, MD1, MD2, MD3
JTAG	1	JTAG_EN pin <sup>2</sup>	TCLK	Input	1	TCK, TMS, TDI, TDO
SSPI	1	Activation key <sup>2</sup>	SCLK	Input	1	SCLK, SCSN, SI, SO
					2	SCLK, SCSN, SD0, SD1
					4	SCLK, SCSN, SD0, SD1, SD2, SD3
I <sup>2</sup> C/I <sup>3</sup> C	1	Activation key	SCL	Input	1	SCL, SDA

**Notes:**

1. Leave unused Configuration ports open.
2. JTAG and SSPI ports share pins. When JTAG\_EN is asserted, the JTAG port takes precedence over SSPI.



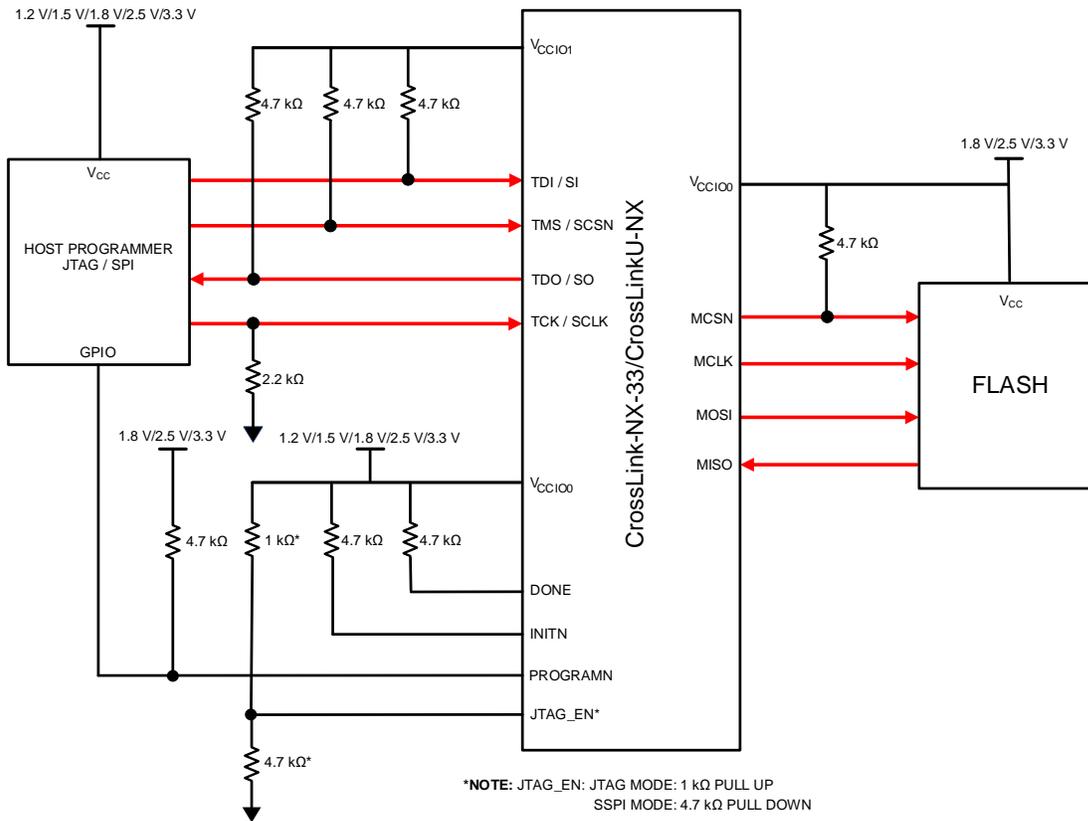


Figure 6.1. Typical Connections for Programming SRAM or External Flash via JTAG/SSPI

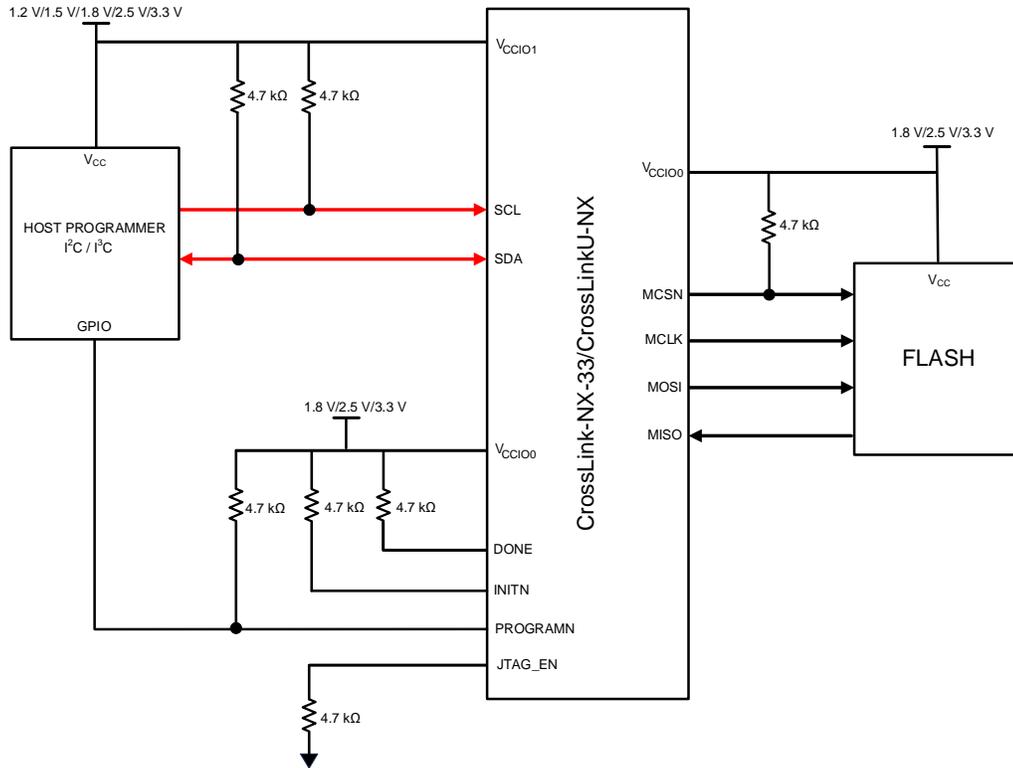

**Figure 6.2. Typical Connections for Programming SRAM via I<sup>2</sup>C/I<sup>3</sup>C**

Some architectures require Bank 0 and Bank 1 to have different bank voltages. One such architecture is illustrated in [Figure 6.3](#). In the event that a control signal, such as PROGRAMN, originates in one voltage domain but is terminated in another, a voltage translating device or circuit must be implemented to reduce excess current leakage or possible device damage. [Figure 6.3](#) shows a voltage translator utilized for PROGRAMN, allowing a 3.3 V driver to safely and efficiently drive the 1.8 V bank 0 input buffer.

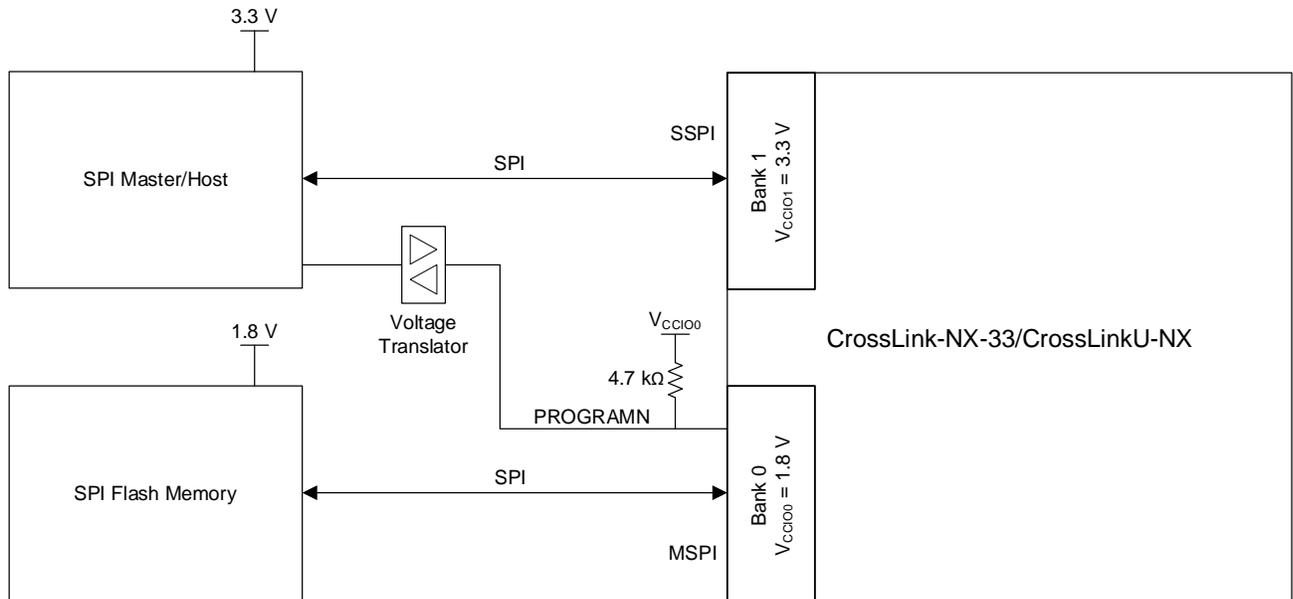

**Figure 6.3. Accommodation for Mixed Voltage Across Configuration Banks**

## 7. External SPI Flash

The SPI Flash voltage should match the  $V_{CCIO0}$  voltage.

It is recommended to use SPI Flash devices that are supported by the Lattice Radiant Programmer.

You can view the list of supported devices by searching for *SPI Flash support* in the Lattice Radiant Programmer Help menu. For SPI Flash devices that are not listed in the *SPI Flash support*, using the **custom flash** option may allow non-supported devices to work.

## 8. I/O Pin Assignments

Crosstalk coupling is reduced in the device packages of LIFCL-33/33U devices. The PCB board, however, can cause significant noise injection from adjacent I/O pins and PCB traces running close together in parallel for long distances. Simulate any suspicious traces using a PCB crosstalk/Signal Integrity simulation tool to determine if a particular layout needs to be improved.

It is common practice for designers to select pinouts for their system very early in the design cycle. For the FPGA designer, this requires a detailed knowledge of the targeted FPGA device. Designers often use a spreadsheet program to initially capture the list of the design I/O. Lattice Semiconductor provides detailed pinout information that can be downloaded from the Lattice Semiconductor website in .csv format for designers to use as a resource to create pinout information. For example, by navigating to the pinout.csv file, you can gather the pinout details for all the different package offerings of the device in the family, including I/O banking, differential pairing, Dual Function of the pins, and input and output details.

### 8.1. Series Termination Resistors

When using series termination resistors, start with a value of 0-Ω due to GPIOs having a relatively high output impedance.

### 8.2. Functional Blocks Rule-Based Pinout Considerations

The LIFCL-33/33U devices support many applications with high-speed interfaces. These include various rule-based pinouts that need to be understood prior to implementation of the PCB design on these high-speed interfaces. The pinout selection must be completed with an understanding of the interface building blocks implemented in the FPGA fabric. These include IOLOGIC blocks such as MIPI, clock resource connectivity, and PLL and DLL usage. Refer to [CrossLink-NX-33 and CrossLinkU-NX High-Speed I/O Interface \(FPGA-TN-02280\)](#) for rules pertaining to these interface types.

### 8.3. LVDS and MIPI Pin Assignments

True LVDS and MIPI signaling inputs and outputs are available on HPIO I/O pins in banks 2, 3, and 4. True LVDS and MIPI input pairing can be found under the High-Speed column in the pin-list .csv file.

WRIO I/O pins in banks 0, 1, and 5 do not support true LVDS and MIPI standard, but can support emulated LVDS outputs. Emulated LVDS output are available on pairs of all banks, but this requires external termination resistors. This is described in [sys/I/O Usage Guide for Nexus Platform \(FPGA-TN-02067\)](#).

Bank voltage must be set to 1.8 V to support LVDS.

Bank voltage must be set to 1.2 V to support MIPI.

### 8.4. HSUL and SSTL Pin Assignments

The HSUL and SSTL interfaces are referenced I/O standards that require an external reference voltage. HSUL and SSTL are supported on HPIO I/O pins in banks 2, 3, and 4 only. The  $V_{REF}$  pin(s) should get high priority when assigning pins on the PCB. These pins can be found in the Dual Function column with  $V_{REF}$  label. Each bank includes a separate  $V_{REF}$  voltage.  $V_{REF}$  sets the threshold for the referenced input buffers. Each I/O is individually configurable based on the bank supply and reference voltages.

## 8.5. USB Block Pin Assignments (LIFCL-33U only)

Connect REXT23 pin to ground using a 300  $\Omega$  1% resistor.

Connect VBUS pin to system USB VBUS signal. If USB VBUS signal is not available this pin can be connected to 3.3 V.

USB block uses a 60 MHz oscillator input. The 104-ball package has low input jitter reference clock pins REFIN\_CLK\_EXT\_P/N. The 84-ball package should use a pair of inputs that support differential clocking, labeled PCLKTx\_y (+true) and PCLKCx\_y (–complement); bank 4 recommended.

PCB Layout of USB differential pairs DP/DM, TX\_M/P, and RX\_M/P should be short length with well-controlled transmission line impedance.

## 9. sysI/O

LIFCL-33/33U devices provide you the flexibility to configure each I/O according to your requirement. These pins can be configured as input, output, and tri-state. Attributes such as PULLMODE, CLAMP, HYSTERESIS, VREF, OPENDRAIN, SLEWRATE, DIFFRESISTOR, TERMINATION, and DRIVE STRENGTH can also be set up.


You can set Pull-up and Pull-down resistors for PULLMODE. The implementation of these resistor is set by using a constant current that have values as specified in [Table 9.1](#).

**Table 9.1. Weak Pull-up/Pull-down Current Specifications**

Configuration	Parameter	Condition	Min	Max	Unit
Pull-up	I/O Weak Pull-up Resistor Current	$0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$	-30	-150	$\mu A$
Pull-down	I/O Weak Pull-down Resistor Current	$V_{IL}(\max) \leq V_{IN} \leq V_{CCIO}$	30	150	$\mu A$

LIFCL-33/33U devices also provide special I/O like HPIO and WRIO that can be used for high-speed communication.

[Figure 9.1](#) shows the block diagram for HPIO and [Figure 9.2](#) shows the block diagram for WRIO.

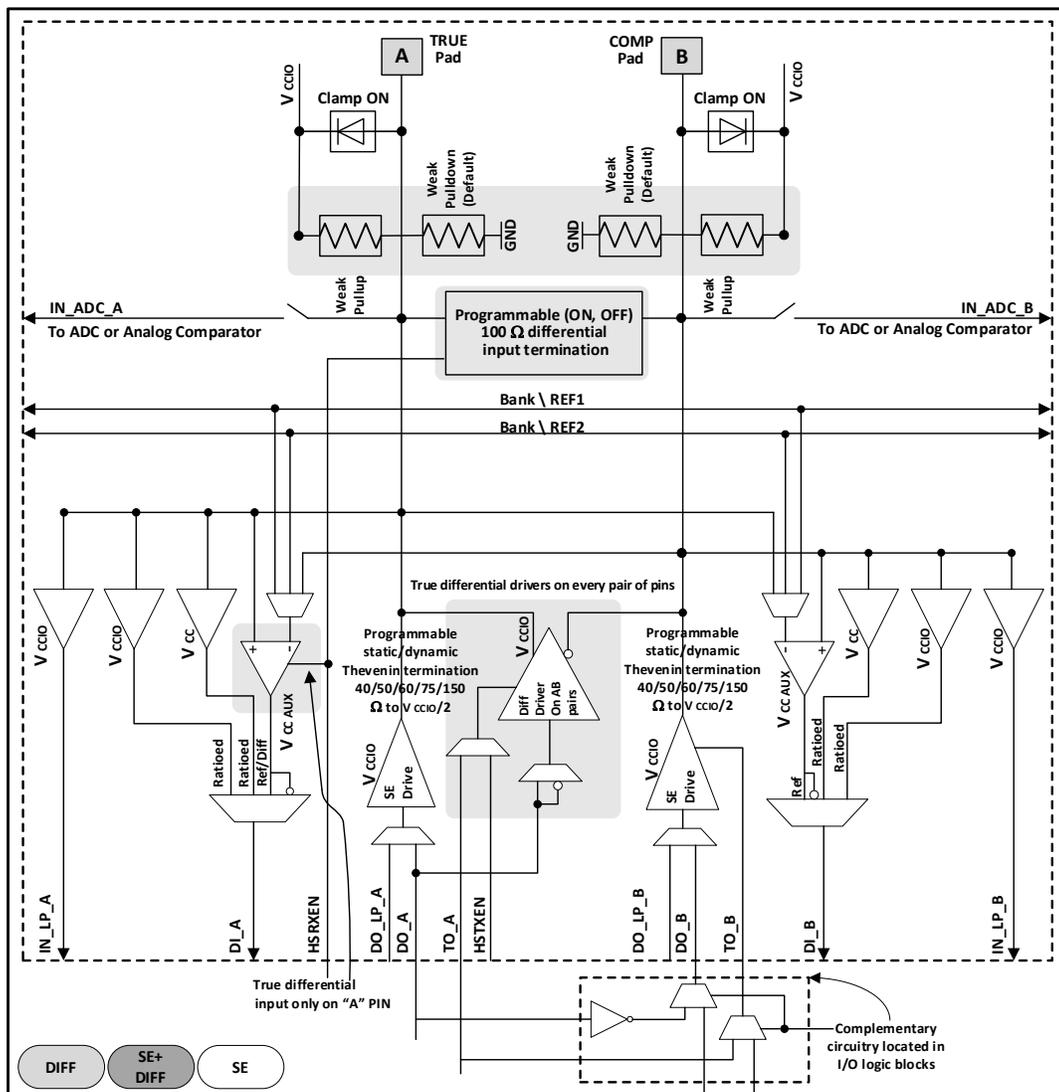

**Figure 9.1. High-Performance sysI/O Buffer Pair for Bottom Side**

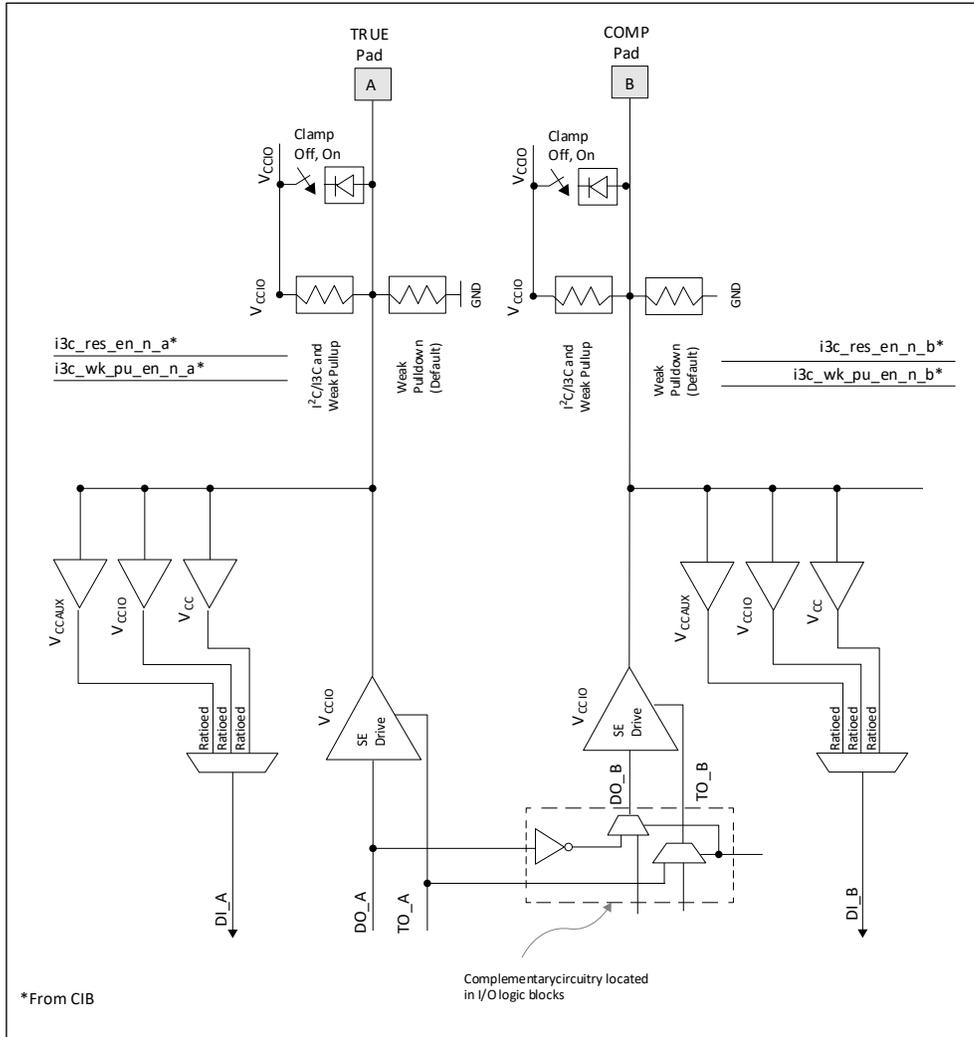



Figure 9.2. Wide-Range sys/I/O Buffer for Top and Left/Right Sides

## 10. Clock Inputs

The LIFCL-33/33U devices provide certain pins for use as clock inputs in each I/O bank. These pins are shared and can alternately be used for General Purpose I/O. When these pins are used for clocking purpose, the user needs to pay attention to minimize signal noise on these pins. Refer to [CrossLink-NX-33 and CrossLinkU-NX High-Speed I/O Interface \(FPGA-TN-02280\)](#).


These shared clock input pins, typically named as GPLL and PCLK, can be found under the *Dual Function* column of the pin-list .csv file. High speed differential interfaces (such as MIPI) received by the FPGA device must route their differential clock pair into a pair of inputs that support differential clocking, labeled as PCLKTx\_y (+true) and PCLKCx\_y (–complement).

When providing an external reference clock to the FPGA device, you have to ensure that the oscillator’s output voltage to the FPGA device does not exceed the bank’s voltage. Good power supply decoupling of the clock oscillator is required to reduce clock jitter. A typical bypassing circuit is shown in [Figure 10.1](#).

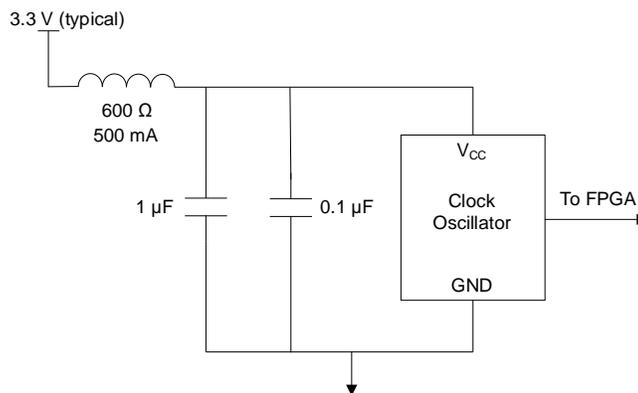

**Figure 10.1. Clock Oscillator Bypassing**

It is recommended to use an HCSL oscillator to keep the clock voltage less than or equal to the bank’s  $V_{CCIO}$  for differential clock inputs to banks with  $V_{CCIO}$  voltage of 1.5 V and lower. An LVDS oscillator can also be used if AC coupled and then DC biased at half of the  $V_{CCIO}$  voltage. An example of a dual footprint design supporting HCSL and LVDS is as shown in [Figure 10.2](#).

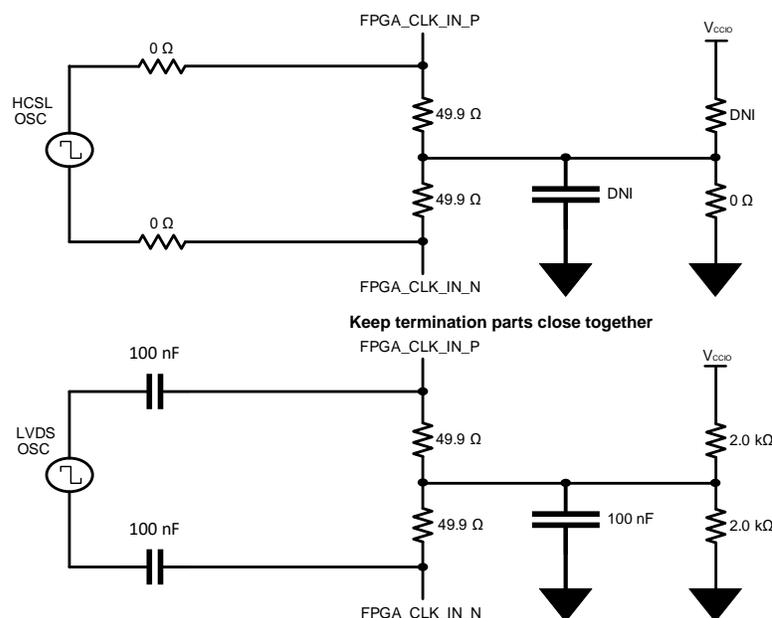


**Figure 10.2. PCB Dual Footprint Design Supporting HCSL and LVDS Oscillators**

## 11. Layout Recommendations

A good design from schematic should also reflect with a good layout for the system design to work without any issues on noise and power distribution. Below are some recommended layouts in general:

- All power should come from power planes to ensure good power delivery and thermal stability.
- Each power pin should have its own decoupling capacitor, typically 100 nF, and should be placed as close as possible to each other.
- Placement of analog circuits must be away from digital circuits or high switching components.
- High speed signals should have a clearance of 5 times trace width from other signals.
- High speed signals that transition from one layer to another should have a corresponding transition ground if both reference planes are ground. If the reference on the other layer is a V<sub>CC</sub> plane, then a stitching capacitor should be used (ground to V<sub>CC</sub>). See [Figure 11.1](#) for details.

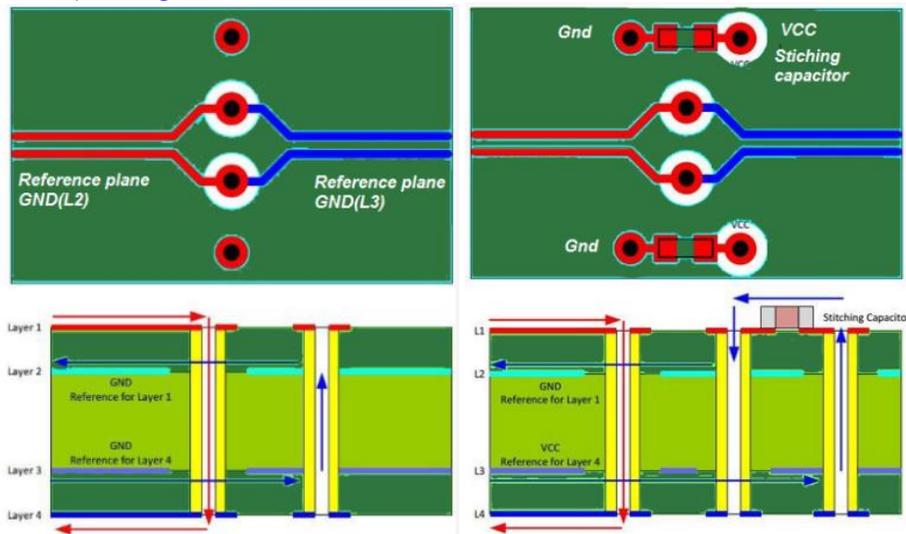

**Figure 11.1. Recommended Layout**

- High speed signals have a corresponding impedance requirement, calculate the necessary trace width and trace gap (differential gap) according to the desired stack-up. Verify trace dimensions with PCB vendor.
- For differential pairs, make sure to match the length as close as possible. A good rule of thumb is to match up to  $\pm 5$  mils.

Refer to the following documents for further information on layout recommendations:

- [PCB Layout Recommendations for BGA Packages \(FPGA-TN-02024\)](#)
- [PCB Layout Recommendations for Leaded Packages \(FPGA-TN-02160\)](#)

## 12. Checklist

**Table 12.1. Hardware Checklist**

	Item	OK	NA
<b>1</b>	<b>FPGA Power Supplies</b>		
1.1	Core Supplies		
1.1.1	$V_{CC}, V_{CCECLK}$ @ 1.0 V $\pm 5\%$		
1.1.2	Use a PCB plane for $V_{CC}, V_{CCECLK}$ with proper decoupling		
1.1.3	$V_{CC}$ core sized to meet power requirement calculation from software		
1.1.4	$V_{CCAUX}, V_{CCAUXA}$ and $V_{CCAUXH2/H3/H4}$ @ 1.8 V $-3\%/+5\%$		
1.1.5	Follow recommended power filtering groups and components in <a href="#">Table 2.2</a> .		
1.1.6	$V_{CCAUXA}$ and $V_{CCAUXH2/H3/H4}$ pins should be ganged together and a solid PCB plane is recommended. This plane should not couple into the $V_{CC}$ core power plane.		
1.1.7	All ground pins need to be connected to the board's ground plane.		
1.2	I/O Supplies		
1.2.1	All <i>Wide Range</i> $V_{CCIO}$ (Banks 0,1,5) are between 1.2 V to 3.3 V.		
1.2.2	All <i>High Performance</i> $V_{CCIO}$ (Bank 2,3,4) are between 1.0 V to 1.8 V.		
1.2.3	Connect unused $V_{CCIO}$ s to a power rail, do not leave them open. Unused banks can use a single 100 nF bypass capacitor.		
1.2.4	All Configuration $V_{CCIO}$ (Banks 0,1), when used with configuration interfaces (for example, SPI Flash memory devices), need to match voltage specifications.		
1.2.5	$V_{CCIO[5:0]}$ used based on user design		
1.2.6	$V_{CCAUX\_AON}$ @ 1.8 V $-3\%/+5\%$ Unused Always On Block can use single 1.8 V 100 nF bypass capacitor.		
1.2.7	Follow recommended power filtering groups and components in <a href="#">Table 2.2</a> .		
1.3.1	AVDD33 @ 3.3 V $-3\%/+5\%$ Unused USB block can use single 3.3 V 100 nF bypass capacitor.		
1.3.2	AVDD18, AVDD18_TX, and AVDD18_COM @ 1.8 V $-3\%/+5\%$ Unused USB block can use single 1.8 V 100 nF bypass capacitor.		
1.3.3	AVDD and AVDD_TX @ 1.0 V $-3\%/+5\%$ Unused USB block can use single 1.0 V 100 nF bypass capacitor.		
1.3.4	Follow recommended power filtering groups and components in <a href="#">Table 2.2</a>		
<b>2</b>	<b>JTAG</b>		
2.1	Pull-up on JTAG_EN to enable JTAG function, per <a href="#">Table 6.2</a> .		
2.2	Keep JTAG_EN accessible on PCB to recover JTAG port, especially during development.		
2.3	Keep JTAG port pins accessible on PCB, especially during development.		
2.4	Pull-down on TCK per <a href="#">Table 6.1</a> .		
2.5	Pull-up on TMS per <a href="#">Table 6.1</a> .		
<b>3</b>	<b>Configuration</b>		
3.1	Pull-down on JTAG_EN to disable JTAG and enable shared pins used for configuration, per <a href="#">Table 6.2</a> .		
3.2	Pull-ups or pull-downs on persisted configuration specific pins per <a href="#">Table 6.1</a> and <a href="#">Table 6.2</a> .		
3.3	$V_{CCIO0}, V_{CCIO1}$ bank voltage matches sysCONFIG peripheral devices such as SPI Flash.		
<b>4</b>	<b>External Flash</b>		
4.1	Flash voltage should match $V_{CCIO0}$ voltage.		
<b>5</b>	<b>Special Pin Assignments</b>		
5.1	$V_{REF}$ assignments followed for single-ended SSTL inputs.		
5.2	Properly decouple the $V_{REF}$ source.		
<b>6</b>	<b>Critical Pinout Selection</b>		
6.1	Pinout is chosen to address FPGA resource connections to I/O logic and clock resources per <a href="#">CrossLink-NX-33 and CrossLinkU-NX High-Speed I/O Interface (FPGA-TN-02280)</a> .		

	Item	OK	NA
6.2	Shared general purpose I/O are used as inputs for FPGA PLL and Clock inputs.		
<b>7</b>	<b>Series Termination Resistors</b>		
7.1	When using series termination resistors start with a value of 0 $\Omega$ due to GPIOs having a relatively high output impedance.		
<b>8</b>	<b>MIPI Interface Requirements</b>		
8.1	Soft MIPI supported on bottom banks 2, 3, and 4.		
8.2	$V_{CCIO}$ set to 1.2 V.		
8.3	MIPI differential pairs must reference a ground plane without slots or breaks. It should be continuous between the FPGA and destination/source		
8.4	Provide a separation of 3 W between positive and negative of a pair (diff-pair spacing). (W is the minimum width of the signal trace allowed.)		
8.5	Provide a separation of 6 W spacing around each differential pair (inter-pair spacing). (W is the minimum width of the signal trace allowed.)		
8.6	Length match clock and data lane pair traces within 0.1 mm.		
8.7	MIPI RX at FPGA should have clock differential pair routed to clock pins labeled PCLKTx_y (+true) and PCLKCx_y (-complement).		
<b>9</b>	<b>LVDS Interface Requirements</b>		
9.1	True LVDS supported on bottom banks 2, 3, and 4.		
9.2	$V_{CCIO}$ set to 1.8 V.		
9.3	LVDS differential pairs must reference a ground plane without slots or breaks. It should be continuous between the FPGA and destination/source		
9.4	Provide a separation of 3 W between positive and negative of a pair (diff-pair spacing). (W is the minimum width of the signal trace allowed.)		
9.5	Provide a separation of 6 W spacing around each differential pair (inter-pair spacing). (W is the minimum width of the signal trace allowed.)		
9.6	Length match pair traces within 0.1 mm.		
9.7	LVDS RX at FPGA should have clock differential pair routed to clock pins labeled PCLKTx_y (+true) and PCLKCx_y (-complement).		
<b>10</b>	<b>USB Interface Requirements</b>		
10.1	Connect REXT23 pin to ground using a 300 $\Omega$ 1% resistor.		
10.2	Connect VBUS pin to system USB VBUS signal. If USB VBUS signal is not available this pin can be connected to 3.3 V.		
10.3	USB block uses a 60 MHz oscillator input.		
10.3.1	The 104-ball package has low input jitter reference clock pins REFIN_CLK_EXT_P/N.		
10.3.2	The 84-ball package should use a pair of inputs that support differential clocking, labeled PCLKTx_y (+true) and PCLKCx_y (-complement); bank 4 recommended.		
10.4	PCB Layout of USB differential pairs DP/DM, TX_M/P, and RX_M/P should be short length with well-controlled transmission line impedance.		

## References

- [CrossLink-NX web page](#)
- [CrossLink-NX-33 and CrossLinkU-NX Data Sheet \(FPGA-DS-02104\)](#)
- [sysCONFIG Usage Guide for Nexus Platform \(FPGA-TN-02099\)](#)
- [sysI/O Usage Guide for Nexus Platform \(FPGA-TN-02067\)](#)
- [sysCLOCK PLL Design and Usage Guide for Nexus Platform \(FPGA-TN-02095\)](#)
- [Memory Usage Guide for Nexus Platform \(FPGA-TN-02094\)](#)
- [CrossLink-NX 33 and CrossLinkU-NX High-Speed I/O Interface \(FPGA-TN-02280\)](#)
- [Thermal Management \(FPGA-TN-02044\)](#)
- [sysDSP Block Usage Guide for Nexus Platform \(FPGA-TN-02096\)](#)
- [Electrical Recommendations for Lattice SERDES \(FPGA-TN-02077\)](#)
- [High-Speed PCB Design Considerations \(FPGA-TN-02178\)](#)
- [Power Decoupling and Bypass Filtering for Programmable Devices \(FPGA-TN-02115\)](#)
- [CrossLink-NX LIFCL-33 Pinout \(FPGA-SC-02040\)](#)
- [CrossLink-NX LIFCL-33U Pinout \(FPGA-SC-02050\)](#)
- [USB 2.0/3.2 IP Core User Guide \(FPGA-IPUG-02237\)](#)
- [PCB Layout Recommendations for BGA Packages \(FPGA-TN-02024\)](#)
- [PCB Layout Recommendations for Leaded Packages \(FPGA-TN-02160\)](#)
- [Lattice Insights web page](#) for Lattice Semiconductor training courses and learning plans

## Technical Support Assistance

Submit a technical support case through [www.latticesemi.com/techsupport](http://www.latticesemi.com/techsupport).

For frequently asked questions, refer to the Lattice Answer Database at <https://www.latticesemi.com/Support/AnswerDatabase>.

## Revision History

### Revision 1.2, March 2024

Section	Change Summary
Acronyms in This Document	Added <i>HPIO</i> , <i>I/O</i> , and <i>WRIO</i> to the list of acronyms.
Power Supplies	Added <a href="#">Figure 2.1. Recommended Power Filters</a> to <a href="#">Recommended Power Filtering Groups and Components</a> section.
Power Sequencing	Moved previous section 2.8. <i>Power Sequencing</i> to this section.
Power Estimation	Moved previous section 2.9 <i>Power Estimation</i> to this section.
Configuration Considerations	<ul style="list-style-type: none"> <li>Moved previous section 5. <i>Configuration Considerations</i> to this section and adjusted header, table, and figure numbers accordingly.</li> <li>Updated <a href="#">Table 6.1. JTAG Pin Recommendations</a>: <ul style="list-style-type: none"> <li>Removed <i>JTAG_EN</i> pin.</li> <li>Updated the <i>PCB Recommendations</i> for <i>TDI/SI</i>, <i>TMS/SCSN</i> and <i>TDO/SO</i> pins.</li> </ul> </li> <li>Updated <a href="#">Table 6.2. Pull-up/Pull-down Recommendations for Configuration Pins</a>: <ul style="list-style-type: none"> <li>Updated the <i>PCB Connections</i> for <i>INITN</i>, <i>DONE</i>, <i>MCLK</i>, <i>MCSN</i>, and <i>TMS/SCSN</i> pins.</li> </ul> </li> <li>Updated the <i>Notes</i> section of <a href="#">Table 6.3. Configuration Pins Needed per Programming Mode1</a>.</li> <li>Added <a href="#">Figure 6.1. Typical Connections for Programming SRAM or External Flash via JTAG/SSPI</a>, <a href="#">Figure 6.2. Typical Connections for Programming SRAM via I2C/I3C</a> and <a href="#">Figure 6.3. Accommodation for Mixed Voltage Across Configuration Banks</a>.</li> <li>Added a paragraph about mixed voltage across configuration banks into <a href="#">Configuration Pins Per Programming Mode</a> section.</li> </ul>
External SPI Flash	Added this section.
I/O Pin Assignments	Moved previous section 6. <i>I/O Pin Assignments</i> to this section and adjusted header numbers accordingly.
sysI/O	Added this section.
Clock Inputs	<ul style="list-style-type: none"> <li>Moved previous section 4. <i>Clock Inputs</i> to this section and adjusted header and figure numbers accordingly.</li> <li>Updated the paragraphs of this section: <ul style="list-style-type: none"> <li>Added the phrase: <i>typically named as GPLL and PCLK</i>.</li> <li>Made editorial fixes.</li> </ul> </li> </ul>
Layout Recommendations	Added this section.
Checklist	<ul style="list-style-type: none"> <li>Moved previous section 7. <i>Checklist</i> to this section and adjusted header and table numbers accordingly.</li> </ul>
References	Added this section.

### Revision 1.1, October 2023

Section	Change Summary
All	<ul style="list-style-type: none"> <li>Updated document title to CrossLink-NX-33 and CrossLinkU-NX Hardware Checklist.</li> <li>Added CrossLinkU-NX information.</li> <li>Used LIFCL-33/33U to refer to the CrossLink-NX-33 and CrossLinkU-NX devices.</li> </ul>
Acronyms in This Document	Added USB.
Introduction	<p>In the Introduction section:</p> <ul style="list-style-type: none"> <li>Added CrossLinkU-NX device support.</li> <li>Updated the titles of the following references: <ul style="list-style-type: none"> <li>CrossLink-NX-33 and CrossLinkU-NX Data Sheet (FPGA-DS-02104)</li> <li>CrossLink-NX 33 and CrossLinkU-NX High-Speed I/O Interface (FPGA-TN-02280)</li> </ul> </li> <li>Added the following references: <ul style="list-style-type: none"> <li>CrossLink-NX LIFCL-33U Pinout (FPGA-SC-02050)</li> <li>USB 2.0/3.2 IP Core User Guide (FPGA-IPUG-02237)</li> </ul> </li> </ul>

Section	Change Summary
Power Supplies	<ul style="list-style-type: none"> <li>Updated Table 2.1. Single-Ended I/O Standards.                             <ul style="list-style-type: none"> <li>In <math>V_{CCIO[5:0]}</math> Voltage (Nominal Value), added 1.0 V for Banks 0,1,5 and removed 1.35 V from Banks 2,3,4.</li> <li>Added power supplies.</li> <li>Added footnotes.</li> </ul> </li> <li>Updated Table 2.2. Recommended Power Filtering Groups and Components.                             <ul style="list-style-type: none"> <li>Added power inputs.</li> <li>Added footnotes.</li> </ul> </li> <li>Added these subsections:                             <ul style="list-style-type: none"> <li>Unused Hardware Always On Block (LIFCL-33U only)</li> <li>Unused USB Block (LIFCL-33U only)</li> </ul> </li> </ul>
Configuration Considerations	Added pins in Table 5.2. Pull-up/Pull-down Recommendations for Configuration Pins.
I/O Pin Assignments	<ul style="list-style-type: none"> <li>Updated information on HPIO and WRIO I/O pins support in the LVDS and MIPI Pin Assignments subsection.</li> <li>Updated information on HPIO I/O pins support in the HSUL and SSTL Pin Assignments subsection.</li> <li>Added the USB Block Pin Assignments (LIFCL-33U only) subsection.</li> </ul>
Checklist	Updated Table 7.1. Hardware Checklist. <ul style="list-style-type: none"> <li>Added items under the <i>FPGA Power Supplies</i> group.</li> <li>Added the <i>USB Interface Requirements</i> group.</li> </ul>
Technical Support Assistance	Added reference to the Lattice Answer Database on the Lattice website.

**Revision 1.0, October 2022**

Section	Change Summary
All	Initial release.



[www.latticesemi.com](http://www.latticesemi.com)